




CARBON FREE HOSE (FIBER GLASS COVER)

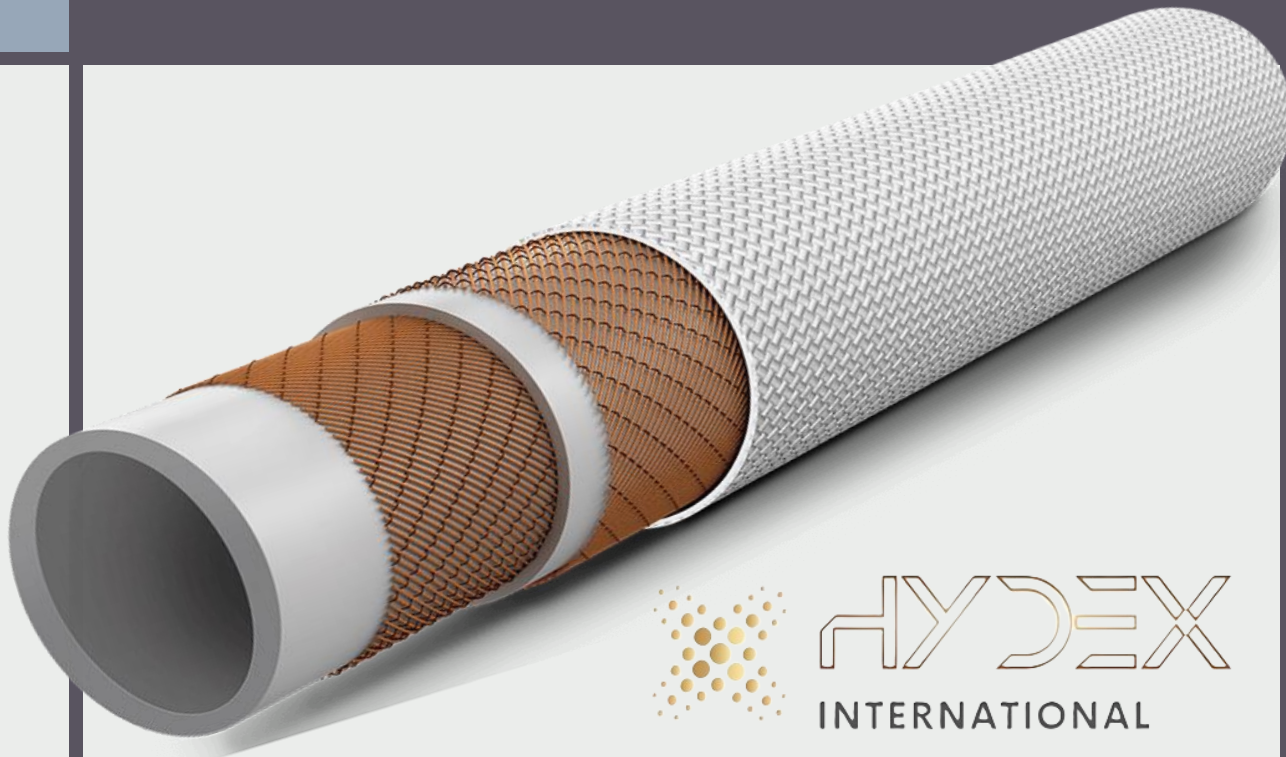

TUBE: Specially engineered non conductive Nitrile rubber, white

REINFORCEMENT: High tensile synthetic tyre cord plies

COVER: Fiber glass cloth wrapped cover, white

TEMP RANGE: -40°C Approx to +100°C Approx
+600°C Approx External Temperature

APPLICATIONS: Speciality hose for non conductive applications, majorly catering to furnace coolant conveyance & low current leakage (less than 20 micro amp at 6 KV DC).

PROPERTIES: Extreme Heat Resistant cover | Uniform Thickness Non-Conductive tube and cover | Industry Leader

APPLICABLE STANDARDS: Indo-Makszon Proprietary

STANDARD COLOUR: Inner Tube - White | Outer Cover - White fiber glass cloth

						
ID	OD	Working Pressure		Bursting Pressure		Max. Coll Length
MM	MM	BAR	PSI	BAR	PSI	MTR
25.40	39.40	17.2	250	69	1000	40
31.80	46.00	17.2	250	69	1000	40
38.50	54.50	17.2	250	69	1000	40
45.00	61.00	17.2	250	69	1000	40
50.80	68.00	17.2	250	69	1000	40
57.00	76.00	17.2	250	69	1000	40
60.00	79.00	17.2	250	69	1000	40
63.40	82.50	14	203	56	800	40
70.00	89.00	14	203	56	800	40
76.00	95.00	14	203	56	800	40

 ID	 OD	 Working Pressure		 Bursting Pressure		 Max. Length
		BAR	PSI	BAR	PSI	MTR
MM	MM					
80.00	99.00	14	203	56	800	40
88.00	110.00	14	203	56	800	40
101.60	125.00	10	145	40	580	40
127.00	154.00	10	145	40	580	40
152.00	179.00	10	145	40	580	40