




CARBON FREE HOSE LL

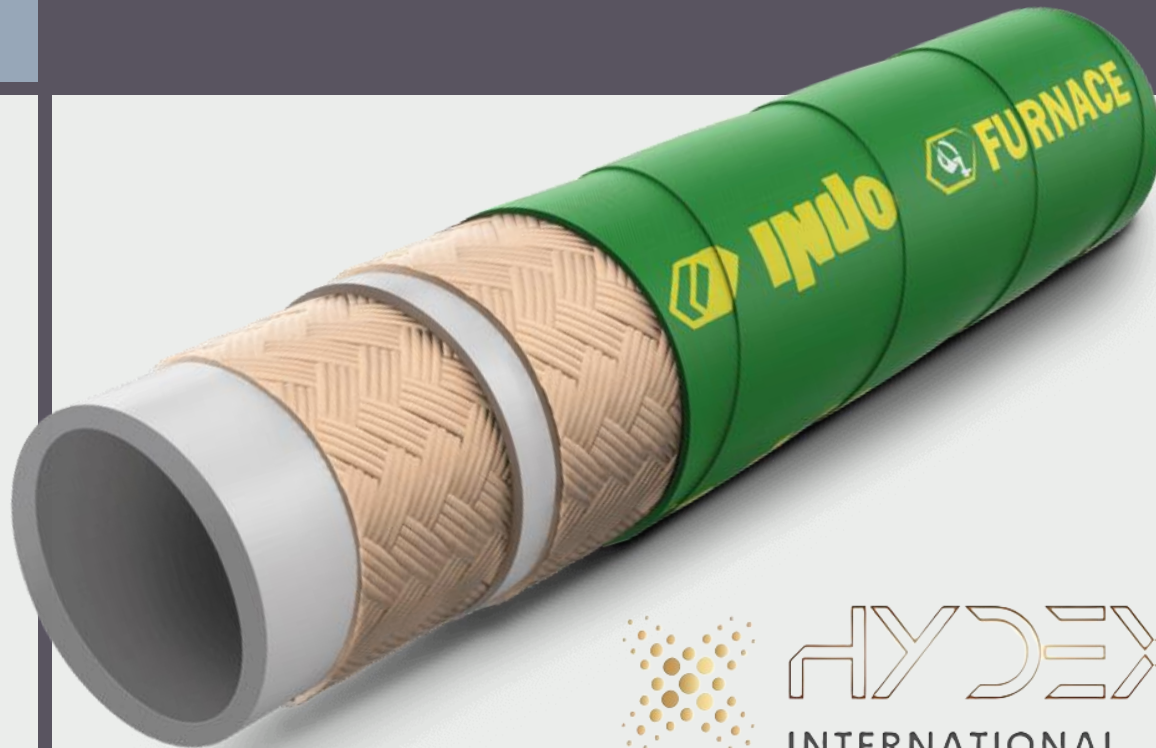

TUBE: Specially engineered non-conductive rubber, white

REINFORCEMENT: One or Multiple layers of Textile reinforced subjected to ID

COVER: Specially engineered rubber cover, green

TEMP RANGE: -40°C to +100°C Approx

APPLICATIONS: Speciality hose for non-conductive applications, majorly catering to furnace coolant conveyance & low current leakage. (less than 20 micro amp at 6 KV DC).

PROPERTIES: Heat Resistant | Non-Conductive tube and cover Uniform Thickness | Industry Leader

APPLICABLE STANDARDS: Indo-Maksson Proprietary

STANDARD COLOUR: Inner Tube - White | Outer Cover - Green

MARKING ON THE HOSE: Indo - Furnace- Carbon Free Hose LL Heat Resistant I.D. W.P. India

 ID		 OD	 Working Pressure		 Bursting Pressure		 Bending Radius		 Weight	 Max. Length
MM	INCH	MM	BAR	PSI	BAR	PSI	MM	INCH	KG/MTR	MTR
10.00	3/8	18.00	17.2	250	69	10000	150	5.90	0.38	100+
12.50	1/2	22.00	17.2	250	69	10000	102	4.00	0.44	100+
16.00	5/8	26.00	17.2	250	69	10000	115	4.5	0.60	100+
20.00	3/4	29.00	17.2	250	69	10000	127	5.00	0.62	100+
25.00	1	37.00	17.2	250	69	10000	127	5.00	0.91	100+
31.00	1.1/4	44.00	17.2	250	69	10000	152	6.00	1.20	50
38.00	1.1/2	51.50	17.2	250	69	10000	203	8.00	1.35	50