




CARBON FREE HOSE

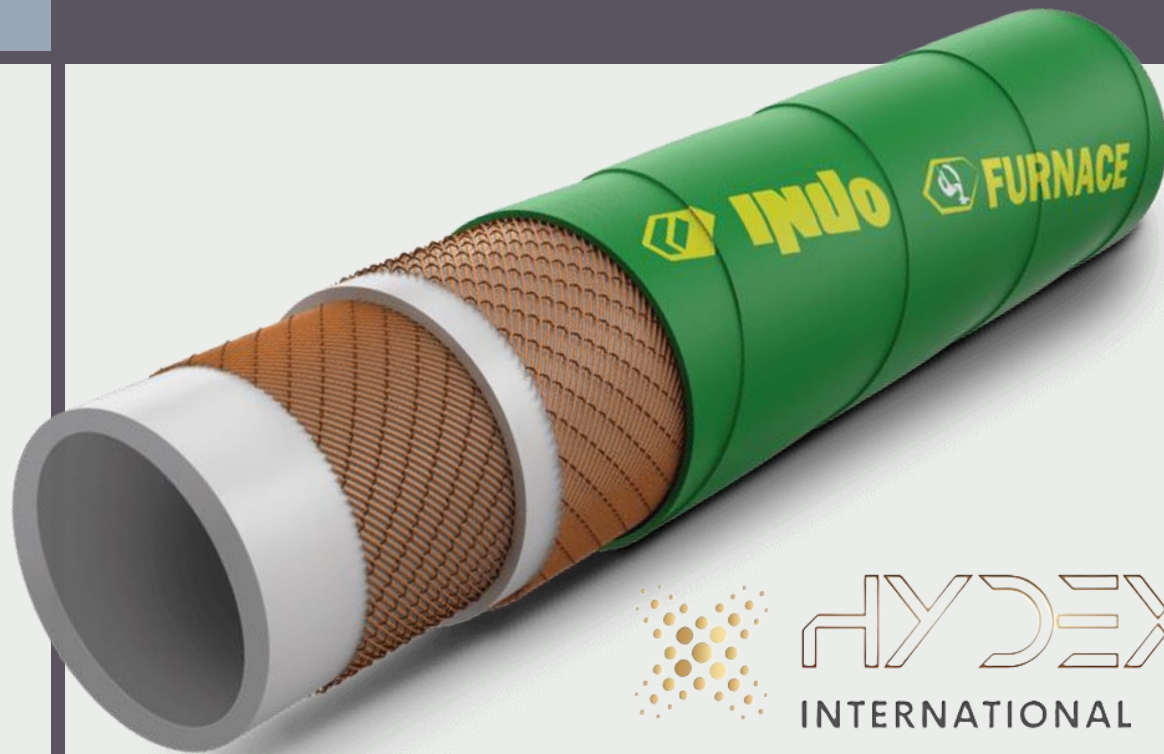

TUBE: Specially engineered non conductive rubber, white

REINFORCEMENT: Subject to ID One or Multiple layers of Textile reinforced subjected to ID

COVER: Specilly engineered Nitrile rubber cover, green

TEMP RANGE: -40°C to +100°C Approx

APPLICATIONS: Speciality hose for non conductive applications, majorly catering to furnace coolant conveyane & low current leakage.

PROPERTIES: Heat Resistant | Non-Conductive tube and cover Uniform Thickness | Industry Leader

APPLICABLE STANDARDS: Indo-Maksson Propietory

STANDARD COLOUR: Inner Tube - White | Outer Cover - Green

MARKING ON THE HOSE: Indo - Furnace- Carbon Free Hose Heat Resistant I.D. W.P. India

 ID		 OD	 Working Pressure		 Bursting Pressure		 Bending Radius		 Weight	 Max. Length
MM	INCH	MM	BAR	PSI	BAR	PSI	MM	INCH	KG/MTR	MTR
31.00	1.1/4	44.00	17.2	250	69	1000	152	6.00	1.30	50
38.00	1.1/2	51.50	17.2	250	69	1000	203	8.00	1.65	50
50.00	2	66.00	14	203	56	800	304	12.00	2.15	40
56.00	2.1/4	77.00	14	203	56	800	500	19.70	2.55	40
63.00	2.1/2	83.00	14	203	56	800	600	23.50	3.15	40
70.00	2.3/4	90.00	14	203	56	800	800	31.50	3.50	40
75.00	3	96.00	14	203	56	800	635	25.00	4.10	40
88.00	3.1/2	111.00	14	203	56	800	1000	39.40	5.20	40
100.00	4	124.00	10	145	30	450	1200	47.20	6.50	40
125.00	5	155.00	10	145	30	450	-	-	9.02	40
152.00	6	179.00	10	145	40	480	-	-	10.80	40